



MODEL S4C

CLASS: Submersed solids handling

CONSTRUCTION: Carbon Steel




CAPACITY: 0-90 gpm [343 lpm]

DISCHARGE PRESSURE: 0-100 psi [6.9 Bar]

MAX SOLID: 3.75" [10 cm]

CONFIGURATION OPTIONS

- ALL-PNEUMATIC CONTROL (XP/explosion-proof and remote locations)
- ELECTRO-PNEUMATIC CONTROL (non-XP)
- GRAVITY FILLED
- FLOW INDUCED (vacuum assisted fill)
- HIGH TEMPERATURE (212F/100C)

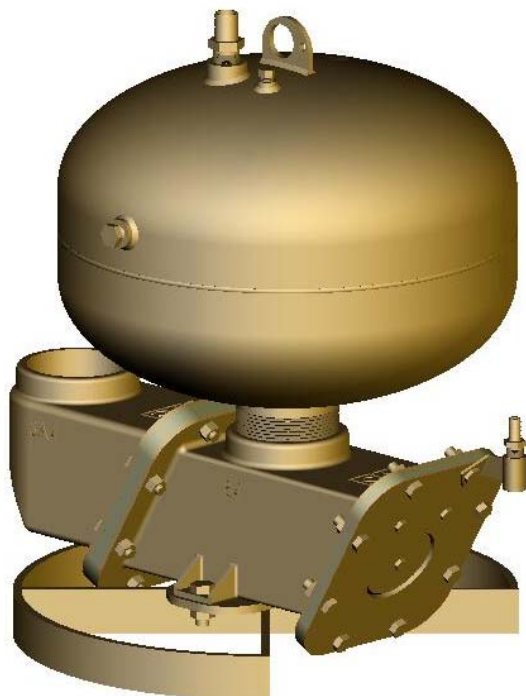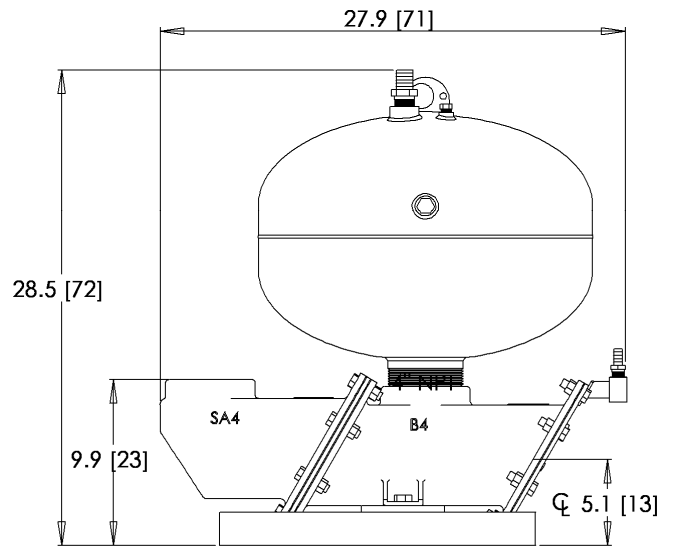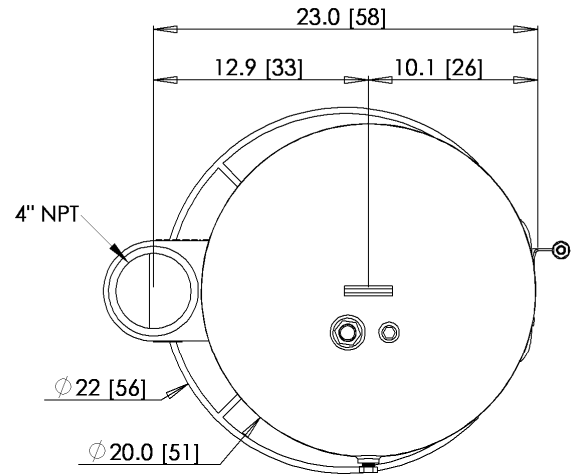

APPLICATION EXAMPLES


Sumps for: coal handling, raw sewage, packing plant waste, wood yard chips/debarking, mill scale, waste paper stock, hide wash, chicken offals, wash-down sumps, tank farms, drilling mud, grains, mining solids, remote compressor stations, boiler blow down, solvents/oils.

This pump will handle debris ranging from stringy to abrasive, up to 3.75" diameter including slurries.

QUICK SPECS

- Weight: 148 lbs [67 kg]
- Stroke Volume: 13.5 gal [51.1 l]
- Operating Levels: 'Flow Induced' - 10" [25 cm], 'Gravity' - 26" [66 cm] (see reverse side for explanation)
- Panel Required: either AP300 or EP250

See reverse side for Specification Details, Flow Curve and Air Consumption

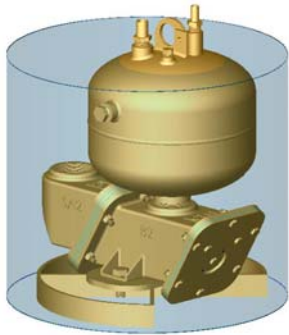

Gravity operation requires an operating level equal to the top of the pump (appr 26").

No compressed air is required for the fill stroke.



F4L flow induction uses a compressed air powered, vacuum generator mounted to the exhaust valve of the control panel. It applies vacuum to the pump during the fill stroke to lower the operating level (appr 10").

*see note below chart for additional air consumption

To specify a pump select a control panel (required) and seat option. Nitrile (std) 15 ft airlines are provided.

Part# **S4C/_/_/_**

SEAT MATERIAL

- N = nitrile (standard)
- V = viton
- T = teflon
- UHD = hard urethane
- E = epdm
- K = kynar

PANEL OPTIONS

- AP300G4 = all-pneumatic, gravity fed.
- EP250G4 = electro-pneumatic, gravity fed.
- AP300F4L = all-pneumatic, low vacuum flow induced.
- EP250F4L = electro-pneumatic, low vacuum flow induced.

Example:

S4C/N/AP300G4 = 4" steel submersible pump with nitrile seats, AP300G4 control panel.

Panel Requirements: Compressed air or dry gas, unlubricated, recommended 80 psi delivered through 3/4" pipe or equal (applies to all panels).

EP250 panels also require 110 vac (<1 A).

Valve seat selection:

- Nitrile - good all-purpose elastomer. Medium chemical, oil and solvent resistance, used up to 150°F.
- Viton - excellent resistance to oxidizers and solvents. Medium strength, used up to 250°F.
- Teflon - excellent chemical resistance to acids, bases and solvents. Lower cycle life, non-elastomeric, used up to 300°F.
- Hard Urethane - high durometer with good abrasion resistance with mild chemical resistance, used up to 150°F.
- EPDM - good heat and acid/base resistance but poor hydrocarbon resistance, used up to 300°F.
- PVDF (kynar) - excellent chemical resistance, toughness and resistance to cold flow (thermoplastic). Good cycle life and can be used up to 250°F.

MAXIMUM FLOW CURVE

with air consumption in SCFM (gravity mode)

HEAD meters	11	22	33	44	55	Operating Flow Capacity:				
220 ft 67.1	11	22	33	44	55	<i>anywhere in shaded area.</i>				
200 ft 61.0	10	20	30	41	51	<i>Air consumption: pick</i>				
180 ft 54.9	9	19	28	37	46	<i>closest cell to your flow & pressure</i>				
160 ft 48.8	8	17	25	34	42	40	47	53	60	67
140 ft 42.7	8	15	23	30	38	35	41	46	52	58
120 ft 36.6	7	13	20	27	33	30	35	39	44	49
100 ft 30.5	6	12	17	23	29	24	28	33	37	41
80 ft 24.4	5	10	15	20	25	19	22	26	29	32
60 ft 18.3	4	8	12	16	20	14	16	19	21	23
40 ft 12.2	3	6	10	13	16	11	13	15	17	19
20 ft 6.1	2	5	7	9	12	14	16	19	21	23
10 ft 3.0	2	4	6	8	10	11	13	15	17	19
GPM	10	20	30	40	50	60	70	80	90	100
lpm	38	76	114	151	189	227	265	303	341	379

AP300G4 Panel



Example 1 (gravity fill): 80 gpm @ 20 ft TDH requires 19 scfm

*Note for flow induction: add 0.17 x gpm to the air consumption.

Example 2 (flow induced): 80 gpm @ 20 ft. Since 80 gpm @ 20 ft uses 19 scfm, then add 0.17 scfm per gpm to that air consumption; in this case 80 x 0.17 scfm or 13.6 scfm. The total consumption is 19 + 13.6 = 32.6 scfm.